

Specialty Series

Specialty Series

Decorative Films
For Special Applications.

“

*A Series of Special
Application Films:*

UV Clear

White Frost

Whiteout

Blackout

”

Specialty Series

DECORATIVE SPECIAL APPLICATION FILMS

The window film world today is not limited to traditional solar control films. Sometimes a window will need a special application film to address a specific issue or concern. Fortunately, Johnson Window Films offers a line-up of Specialty Series films to help respond to unique window treatment situations.

UV Clear – a clear, invisible film blocking 99% of harmful UV rays. Great for storefronts looking to reduce interior fading and homeowners in need of UV protection who do not want the look of window film.

White Frost – a semi-transparent film designed for windows where sunlight is desired, but total day and night privacy is needed. Works well on large bathroom windows, half-moon windows, as well as internal office and conference windows. Can also be used to create film designs.

Whiteout & Blackout Films – opaque white & black films developed to create total privacy. Excellent for eliminating views inside a window where valuable items are kept. Applications include storage buildings, glass cabinets and counter tops.



Johnson Window Films



Specialty Series

DECORATIVE SPECIAL APPLICATION FILMS


- **Blocks 99% of harmful UV rays** – reduces interior fading (furniture, wood floors, rugs and paintings) and helps minimize health risks from sunlight
- **CST™ scratch resistant hardcoat** – long-lasting durability
- **Lifetime Residential / 10 Year Commercial guarantee** – manufacturer’s warranty against cracking, peeling, bubbling or delamination

S O L A R S P E C I F I C A T I O N S

FILM TYPE	COLOR	VISIBLE LIGHT TRANSMISSION	SOLAR ENERGY REJECTED	SHADING COEFFICIENT	SOLAR HEAT GAIN COEFFICIENT	U FACTOR NFRC	VISIBLE LIGHT REFLECTION	SOLAR ENERGY ABSORBED
UV Clear	clear	86%	15%	0.98	0.85	1.05	10%	8%
White Frost	white	71%	26%	0.85	0.74	1.08	22%	10%
Whiteout	white	10%	77%	0.27	0.23	1.07	71%	21%
Blackout	black	0%	70%	0.35	0.30	1.06	6%	94%

Solar specifications testing performed on film mounted to 1/8" clear glass. Tests, equipment and methods according to ASTM, ANSI, and NFRC standards. Calculations performed using L.B.L. Optics/Window 5.2. Values expressed hereof are typical and provided for comparative purposes only.

TYPICAL CONSTRUCTION OF SPEC FILMS

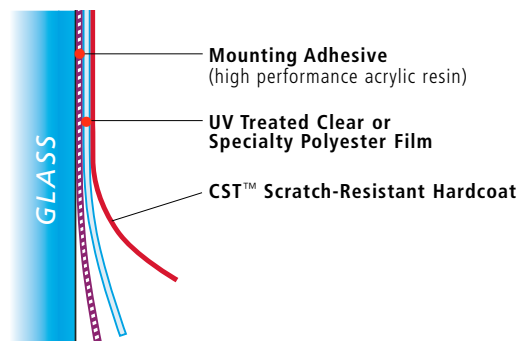

Dealer Contact Area



Johnson Window Films

Manufactured by Johnson Laminating & Coating, Inc. Carson, California USA

www.johnsonwindowfilms.com

