


# Sunset Bronze

## Sunset Bronze™

Warm, Copper Look That Lasts.

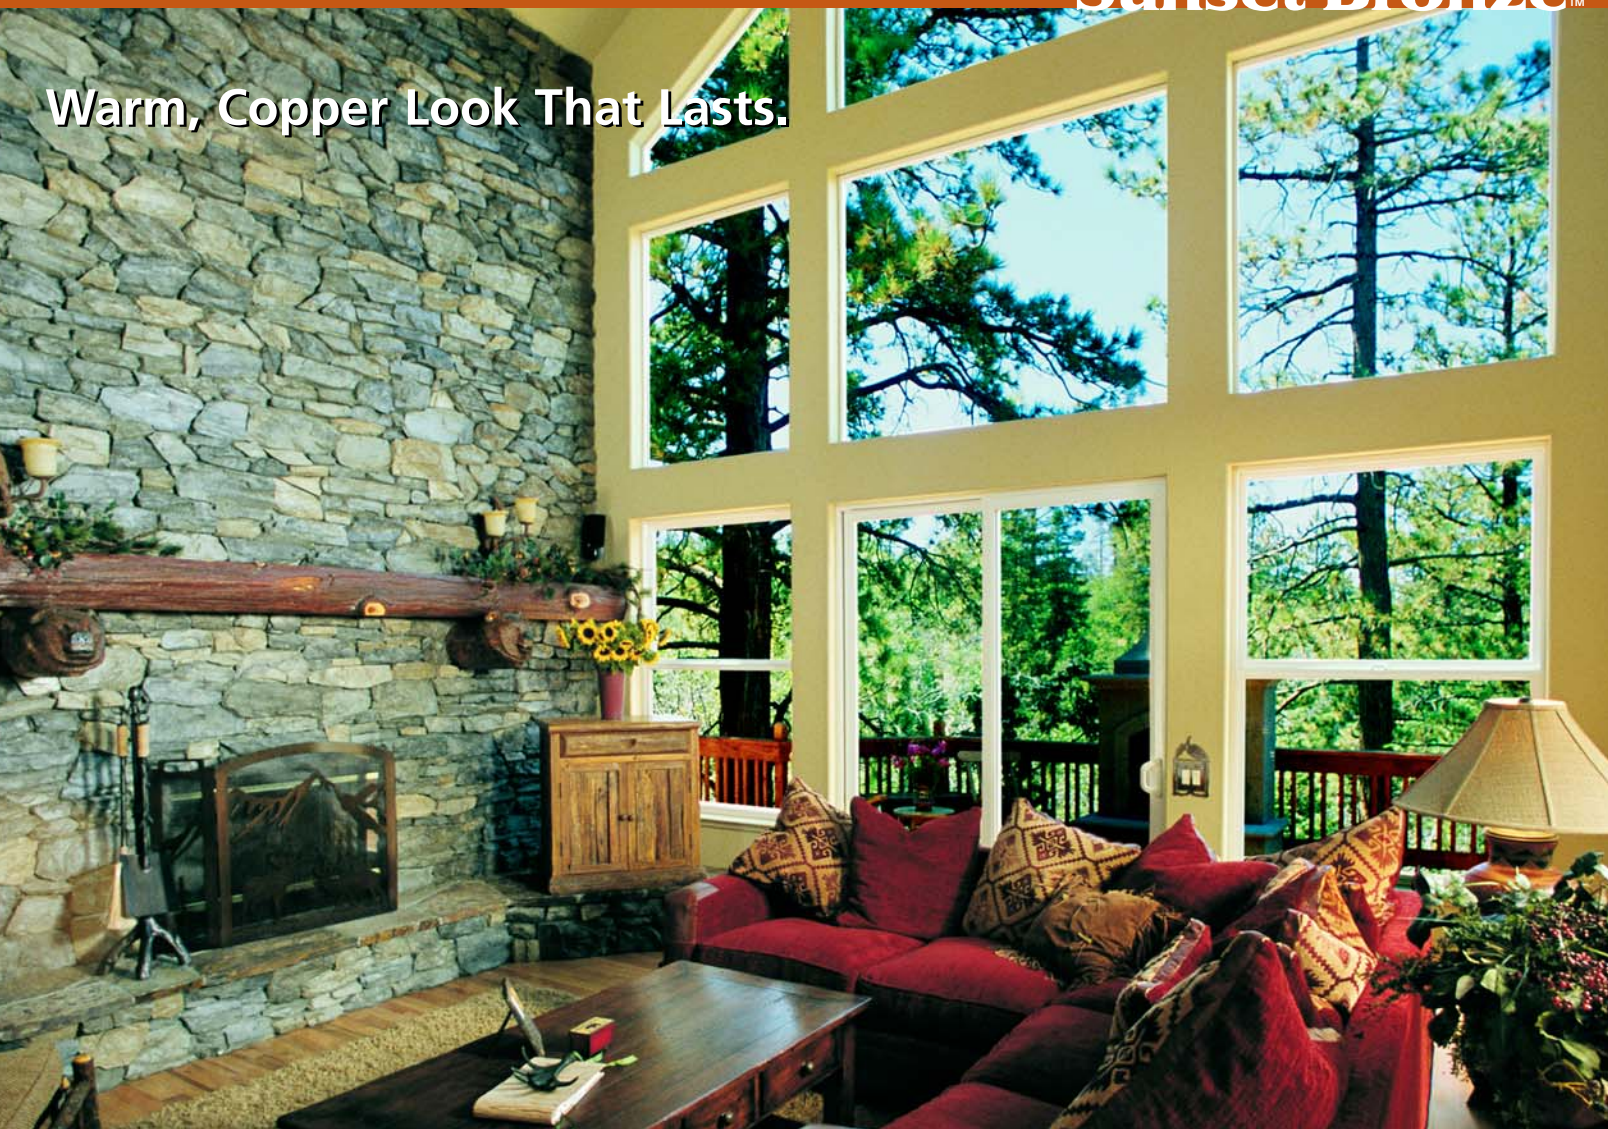

“

*Sunset Bronze matches the deep, rich wood of this country cabin while delivering strong solar protection.*

”

## Sunset Bronze™

COPPER, NON-FADING SPUTTERED FILMS

Getting the right look is extremely important. Sunset Bronze films not only deliver exceptional solar protection, but the warm, copper design will enhance a home's appearance as well as complement many commercial buildings.

SB's sputtered, metallized construction provides up to 78% heat protection, thus balancing and controlling bothersome hot spots inside a home or office. Plus, SB films are designed to never fade and will block up to 99%

of the harmful UV rays that cause interior fading to furniture, wood floors and rugs.

There are several film shades to choose from. Lighter films are perfect for homeowners who don't necessarily want a strong window film "look." Darker bronze tones match up well with today's commercial building exteriors. All Sunset Bronze films include Johnson's durable CST™ scratch resistant hardcoat.



Johnson Window Films



## Sunset Bronze™

COPPER, NON-FADING SPUTTERED FILMS


- Sputtered metal construction – warm, copper shades that will not fade
- High heat rejection – helps to lower energy costs and provides a more comfortable household/office experience
- Cut down sun glare – reduces eye strain while delivering easier outside viewing
- Blocks 99% of harmful UV rays – reduces interior fading (furniture, wood floors, rugs and paintings) and helps minimize health risks from sunlight
- CST™ scratch resistant hardcoat – long-lasting durability
- Lifetime Residential / 10 Year Commercial guarantee – manufacturer's warranty against cracking, peeling, bubbling or delamination

### S O L A R   S P E C I F I C A T I O N S

FILM TYPE	COLOR	VISIBLE LIGHT TRANSMISSION	SOLAR ENERGY REJECTED	SHADING COEFFICIENT	SOLAR HEAT GAIN COEFFICIENT	U FACTOR NFRC	VISIBLE LIGHT REFLECTION	SOLAR ENERGY ABSORBED
SB 50	bronze	54%	47%	0.62	0.53	0.98	16%	29%
SB 30	bronze	32%	68%	0.37	0.32	0.96	30%	31%
SB 20	bronze	20%	79%	0.25	0.21	0.94	38%	33%

Solar specifications testing performed on film mounted to 1/8" clear glass. Tests, equipment and methods according to ASTM, ANSI, and NFRC standards. Calculations performed using L.B.L. Optics/Window 5.2. Values expressed hereof are typical and provided for comparative purposes only.

### T Y P I C A L   C O N S T R U C T I O N   O F   S B   F I L M S

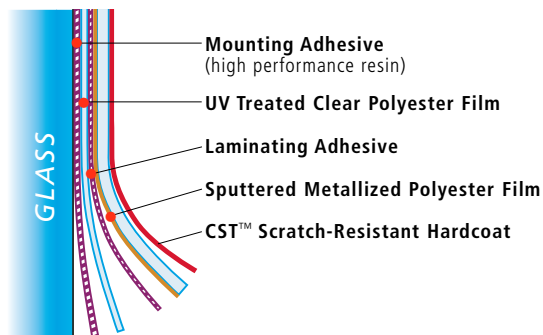

Dealer Contact Area



**Johnson® Window Films**

Manufactured by Johnson Laminating & Coating, Inc. Carson, California USA

[www.johnsonwindowfilms.com](http://www.johnsonwindowfilms.com)

